



FORTINO® Riviera

The compact windproof parasol



Unique selling proposition

- F-line design language: uniform design of the models Fortello, Fortero and Fortino Riviera
- Modern look thanks to extra flat roof of the parasol
- Counter-rotating opening principle:
Quick and easy operation using tensioning lever
High closing height (no need to move the furniture)
- 80 km/h wind stability at size Ø 250 cm
- Top quality material selection
- Osyrion Spot battery-powered LED light with remote
- Quickship program available

Places of use

- Small area outdoors
- Terraces & rooftops
- Public spaces & parks
- Corrosive environments



FORTINO® Riviera

The compact windproof parasol

Basic model

Frame

- 8 parts made from anodised aluminium
- Profiled two-part pole
- Pole profile Ø 38.4 mm and 2 mm wall thickness
- Roof struts 14 × 20 mm

Frame material

- Aluminium: EN-AW-6063-T5
- Screws and rivets made from stainless steel A4
- Glass-fibre reinforced plastic parts: PA6GF30
- Anodisation:
 - Profile surface finishing
 - High degree of hardness – wear resistance (“scratch-resistant”)
 - Increased corrosion resistance
 - Natural appearance (adaptation to environment)
 - Modern look (luxurious matt)

Frame colour

- Anodised natural matt

Opening principle

- Counter-rotating (telescopic system)
- Fast opening thanks to slide and tensioning lever

Canopy

- Without flounce (flounce for a surcharge)
- Self-tautening thanks to the flexible strut ends
- Available in 3 fabric qualities:
 - 100 % polyacrylic approx. 300 g/m² (spun dyed)
 - 100 % polyester approx. 250 g/m² (spun dyed)
 - 100 % polyester approx. 220 g/m² (piece dyed)
- Replaceable or interchangeable canopies

Wind stability

- Up to 80 km/h (with fixed anchorage)
- Tested in a wind tunnel

Fixations

[More information](#)

- Bases / parasol stands
- Ground sockets
- Mounting plates without or with installation height made to measure*
- Mounting plates for insulation floors*
- Mounting plates for insulation floors with high insulation*
- Base plates made to measure*
 - * Adapter required

Additional options – Standard accessories


[More information](#)

- Osyrion Spot battery-powered LED light, removable
- Protective cover


Special product solutions – Made to measure

[More information](#)


- Glatz Green® Special fabric
- Special fabrics (third-party fabrics, flame retardant)
- Custom flounces & edging strips
- Printing & advertising print

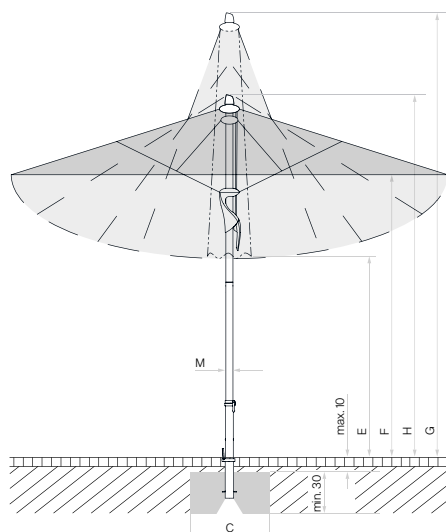

Loose cover max. 10 cm, concrete thickness
min. 30 cm (pay attention to frost depth), Guarantee
water drainage



8 parts



8 parts


| Nominal size | Lateral distance | Pole Ø | Area covered | Height closed | Clear headroom | Total height | Height open | Foundation | Minimum weight for base | max. wind speed open perm. |
|--------------|------------------|----------|----------------|---------------|----------------|--------------|-------------|------------|-------------------------|----------------------------|
| cm | cm | cm | m ² | cm | cm | cm | cm | cm | kg | km/h (wind force) |
| A | AS | M | B | E | F | G | H | C | | |
| Ø 250 | 230 | 3.8 | 4.4 | 150 | 205 | 285 | 240 | 60 × 60 | 40 | 80 (9) |
| Ø 300 | 275 | 3.8 | 6.4 | 140 | 205 | 300 | 245 | 70 × 70 | 55 | 60 (7) |
| 200 × 200 | - | 3.8 | 4.0 | 135 | 205 | 285 | 240 | 60 × 60 | 40 | 70 (8) |
| 240 × 240 | - | 3.8 | 5.8 | 115 | 205 | 295 | 245 | 70 × 70 | 55 | 60 (7) |

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

Height dimensions are based on ground socket BT. These vary slightly depending on the type of base. Except for steel base minus 5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

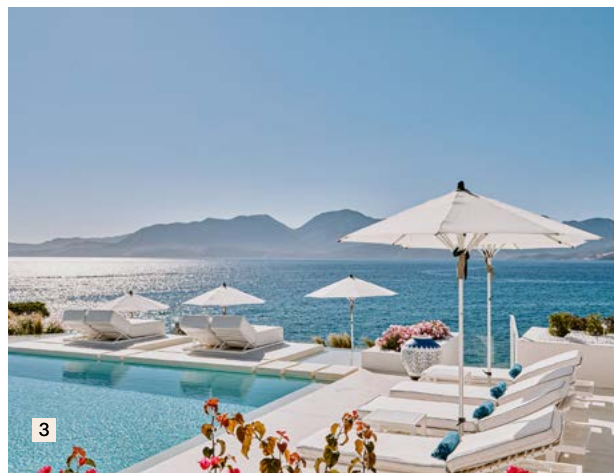

Glatz AG

+41 52 723 66 44
 contract@glatz.com
 glatz.com

