

TW

TEAKWOOD

The elegant masterpiece in precious timber



Unique selling proposition

- Impresses with its charm and attention to detail
- With a focus on a classic ambience, nature and emotions
- Opening principle with double pulley system
- Sophisticated production and the finest material selection:
 - Frame made from untreated teak
 - Leather edges, rustproof metal fittings and rope matching the pole colour
 - Bottom section of the pole protected against moisture
- Osyrion Spot battery-powered LED light with remote

Places of use

- Small area outdoors

Basic model

Frame

- 8 parts made from teak
- Continuous pole
- Pole profile Ø 48 mm
- Roof struts 18 × 33 mm

Frame material

- Natural teak
- Rustproof metal fittings with stainless steel look and rope to match the pole colour
- Bottom section of the pole protected against moisture

Opening principle

- Double pulley system
- Parasol roof fastened with a metal pin (3 increments for retightening)

Canopy

- Without flounce
- With leather-reinforced fabric edges
- Available in 2 fabric qualities:
 - 100 % polyacrylic approx. 300 g/m² (spun dyed)
 - 100 % polyester approx. 250 g/m² (spun dyed)
- Replaceable or interchangeable canopies

Wind stability

- Up to 30 km/h (with fixed anchorage)

Fixations

[More information](#)

- Bases / parasol stands
- Ground sockets
- Mounting plates without or with installation height made to measure

Additional options – Standard accessories


[More information](#)

- Osyrion Spot battery-powered LED light, removable
- Protective cover


Special product solutions – Made to measure

[More information](#)


- Glatz Green® Special fabric
- Special fabrics (third-party fabrics, flame retardant)
- Printing & advertising print

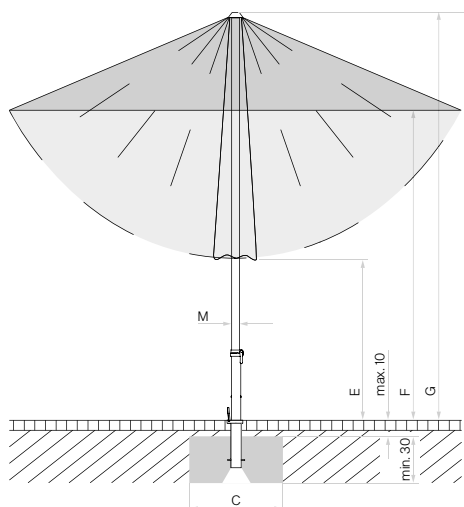

Loose cover max. 10 cm, concrete thickness
min. 30 cm (pay attention to frost depth), Guarantee
water drainage



8 parts



8 parts


Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	E	F	G	C		
Ø 300	275	4.8	6.4	135	220	285	60 × 60	40	30 (5)
Ø 350	325	4.8	8.7	105	215	285	60 × 60	55	30 (5)
330 × 330	-	4.8	10.9	45	220	285	60 × 60	70	30 (5)

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

The height dimensions are based on the ground socket PX. In the base variations these might differ slightly. Apart from the steel base minus 7.5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

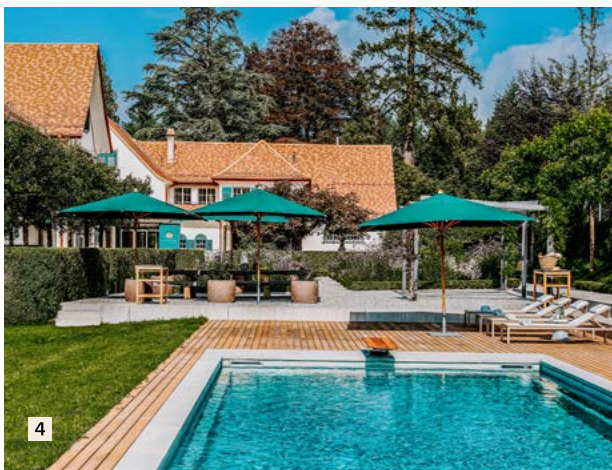

Glatz AG

+41 52 723 66 44
 contract@glatz.com
 glatz.com

