



FORTINO® Riviera
The compact windproof parasol



Unique selling proposition

- F-line design language: uniform design of the models Fortello, Fortero and Fortino Riviera
- Modern look thanks to extra flat roof of the parasol
- Counter-rotating opening principle:
Quick and easy operation using tensioning lever
High closing height (no need to move the furniture)
- 80 km/h wind stability at size Ø 250 cm
- Top quality material selection
- Osyrion Spot battery-powered LED light with remote
- Quickship program available

Places of use

- Small area outdoors
- Terraces & rooftops
- Public spaces & parks
- Corrosive environments



FORTINO® Riviera

The compact windproof parasol

Basic model

Frame

- 8 parts made from anodised aluminium
- Profiled two-part pole
- Pole profile Ø 38.4 mm and 2 mm wall thickness
- Roof struts 14 × 20 mm

Frame material

- Aluminium: EN-AW-6063-T5
- Screws and rivets made from stainless steel A4
- Glass-fibre reinforced plastic parts: PA6GF30
- Anodisation:
 - Profile surface finishing
 - High degree of hardness – wear resistance (“scratch-resistant”)
 - Increased corrosion resistance
 - Natural appearance (adaptation to environment)
 - Modern look (luxurious matt)

Frame colour

- Anodised natural matt

Opening principle

- Counter-rotating (telescopic system)
- Fast opening thanks to slide and tensioning lever

Canopy

- Without flounce (flounce for a surcharge)
- Self-tautening thanks to the flexible strut ends
- Available in 3 fabric qualities:
 - 100 % polyacrylic approx. 300 g/m² (spun dyed)
 - 100 % polyester approx. 250 g/m² (spun dyed)
 - 100 % polyester approx. 220 g/m² (piece dyed)
- Replaceable or interchangeable canopies

Wind stability

- Up to 80 km/h (with fixed anchorage)
- Tested in a wind tunnel

Fixations

[More information](#)

- NEW Bases / parasol stands
 - Ground sockets
 - Mounting plates without or with installation height made to measure*
 - Mounting plates for insulation floors*
 - Mounting plates for insulation floors with high insulation*
 - Base plates made to measure*
- * Adapter required

Additional options – Standard accessories


[More information](#)

- Osyrion Spot battery-powered LED light, removable
- Protective cover


Special product solutions – Made to measure

[More information](#)


- Glatz Green® Special fabric
- Special fabrics (third-party fabrics, flame retardant)
- Custom flounces & edging strips
- Printing & advertising print

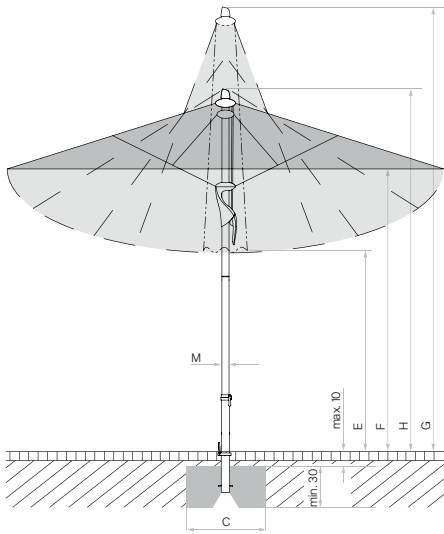

Loose cover max. 10 cm, concrete thickness
min. 30 cm (pay attention to frost depth), Guarantee
water drainage



8 parts



8 parts

| Nominal size | Lateral distance | Pole Ø | Area covered | Height closed | Clear headroom | Total height | Height open | Foundation | Minimum weight for base | max. wind speed open perm. |
|--------------|------------------|--------|----------------|---------------|----------------|--------------|-------------|------------|-------------------------|----------------------------|
| cm | cm | cm | m ² | cm | cm | cm | cm | cm | kg | km/h (wind force) |
| A | AS | M | B | E | F | G | H | C | | |
| Ø 250 | 230 | 3.8 | 4.4 | 150 | 205 | 285 | 240 | 60×60 | 55 | 80 (9) |
| Ø 300 | 275 | 3.8 | 6.4 | 140 | 205 | 300 | 245 | 70×70 | 70 | 60 (7) |
| 200×200 | - | 3.8 | 4.0 | 135 | 205 | 285 | 240 | 60×60 | 55 | 70 (8) |
| 240×240 | - | 3.8 | 5.8 | 115 | 205 | 295 | 245 | 70×70 | 70 | 60 (7) |

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

Height dimensions are based on ground socket BT. These vary slightly depending on the type of base. Except for steel base minus 5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.



Glatz AG

+41 52 723 66 44
contract@glatz.com
glatz.com

