



Effortless shade.

The sunshine and warmth of summer awaken a sense of ease and lightness within us. The VITA Sfera translates this feeling into a uniquely floating, weightless design.

Savour the stylishly serene ambience that surrounds you in the shade of the VITA Sfera when you set it up in your favourite outdoor space.

The comfort crank allows the parasol to be opened effortlessly as it spreads out like a leaf canopy while you and the people enjoying its shade take a few moments to savour la dolce vita.



VITA® Sfera

The aesthete with a floating design



01/2026 en - 259 422 60 261 © by Glatz AG



Frame	8 ribs Mast profile oval 63 x 96 x 2.6 mm Crank housing, trolley, support arm guide and head made from die-cast aluminium Screws and rivets made from stainless steel M4 turnable ball-bearing base, powder-coated cast steel, is included
Function	Crank drive for synchronous opening Removable crank Roof pitch up to 54° on both sides using ergonomic tilting rod 360° rotation thanks to the turnable base with pedal
Frame colour	Silk grey powder-coated aluminium Anthracite powder-coated aluminium
Canopy	Fabric quality 5: polyacrylic, 300 g/m², UV protection > 98 % Self-tensioning through flexible rib ends
Flounce	Only available without
Protective cover	Included in delivery
Electrical accessories	Osyron Spot LED with integrated battery pack



Usage locations



Fixation



VITA® Sfera
Int. Patents pend. © Int. Design reg.

Valid from 1.1.2026
glatz.com



VITA® Sfera 2026 season

Glatz

Assortment

Frame aluminium, powder-coated

Shape	Nominal size	Number of ribs	Order no. silk grey	Order no. anthracite
	cm			
○	Ø 375	8	086 00 375 201	086 00 375 301
□	300 x 300	8	086 00 301 201	086 00 301 301
	350 x 350	8	086 00 351 201	086 00 351 301
▭	400 x 300	8	086 00 402 201	086 00 402 301


Nominal size	Lateral distance	Mast Ø	Area covered	Crank handle height	Height closed	Clear head-room	Total height / open	Lowest height when opening + closing	Height of mast	Over-hang at the back	Length of free-arm	Foundation	Minimum weight for base	Max. wind speed open (Bft.)
A	AS	M	D	E	F	G / G¹	M²	N	Z	C				
Ø 375	348	6.3 x 9.6	10.0	70	130	215	305 / 270	130	265	11	210	60 x 60	180	45 (6)
300 x 300	-	6.3 x 9.6	9.0	70	55	215	265 / 260	55	265	11	170	60 x 60	180	50 (7)
350 x 350	-	6.3 x 9.6	12.2	70	45	215	290 / 270	45	265	11	195	60 x 60	180	40 (6)
400 x 300	-	6.3 x 9.6	12.0	70	35	215	285 / 265	35	265	11	190	60 x 60	180	40 (6)

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

The height dimensions are based on the ground socket M4. For the M4 base, 180 kg, these vary by plus 15.5 cm.

The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

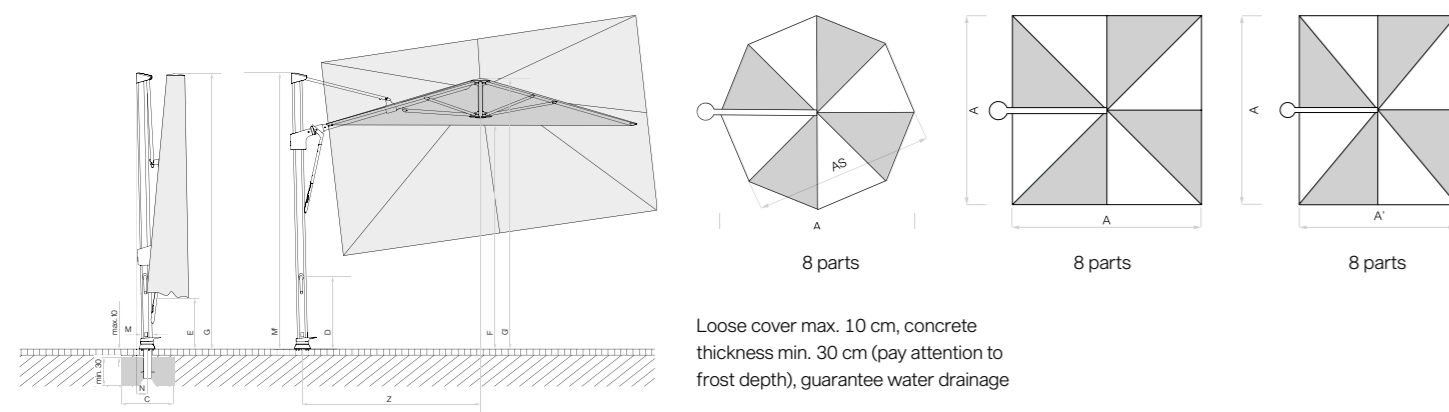

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), guarantee water drainage

Protective cover

Protective cover made of coated, tear-resistant polyester fabric

	Absolutely necessary	Order no.
1 Protective cover with zip and rod to VITA Sfera Ø 375 cm NEW		350 01 221 504
1 Protective cover with zip and rod to VITA Sfera 300 x 300 cm NEW		350 01 221 505
1 Protective cover with zip and rod to VITA Sfera 350 x 350, 400 x 300 cm NEW		350 01 221 506

Accessories

Electrical accessories

2 OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3 OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100

Fixations

Ground sockets

4 Ground socket M4, hot-dip galvanised steel		350 01 226 510
--	--	----------------

Mounting plates

5 Mounting plate M4 / M8, 30 x 30 x 1.5 cm, hot-dip galvanised steel		350 01 226 921
6 Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel		350 01 226 932
7 Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel		350 01 226 930
8 Mounting plate M4 for high insulation (50–350 mm), installation height (50–350 mm) made to measure (higher on request), hot-dip galvanised steel		350 01 222 510

Wall consoles

9 Wall console M4, extension 480 mm, hot-dip galvanised steel		350 01 229 405
10 Wall console M4, extension 100 mm, hot-dip galvanised steel		350 01 229 410

Bases

11 Base frame M4, 180 kg, (for 12 plates 40 x 40 x 4 cm), 91 x 91 x 15.5–19.5 cm, hot-dip galvanised steel, adjustable and levellable (price without plates)		350 01 108 335
Slab set, 12 pieces, 40 x 40 x 4 cm, (approx. 165 kg), concrete		350 01 226 907
Slab set, 12 pieces, 40 x 40 x 4 cm, (approx. 170 kg), 8 pieces concrete, 4 pieces in granite-look		350 01 226 906
12 Cover for M4 base 180 kg, 96 x 96 x 15 cm, plastic ABS coated, anodised aluminium look		350 01 100 717
13 Cover for M4 base 180 kg, 96 x 96 x 15 cm, plastic ABS coated, anthracite		350 01 100 730
14 ^{3,6} Set of castors for base M4 120 kg / 180 kg, (maximum weight 240 kg), Ø 5 cm, H = 5.5 cm, galvanised steel		350 01 100 500

Bases with castors

15 ^{3,7} Base frame with castors M4, 180 kg, 94 x 94 x 14.6 cm, hot-dip galvanised steel, anthracite RAL 7016 frame approx. 30 kg (without decorative plate)	Weight Set + decorative plate	350 01 113 820
16 ^{3,7} Base frame with castors M4, 180 kg, 94 x 94 x 14.6 cm, hot-dip galvanised steel, silk grey RAL 7044, frame approx. 30 kg (without decorative plate) NEW	Weight Set + decorative plate	350 01 113 830
Weight Set for base with castors M4, 180 kg, 4 pieces, concrete, (Weight Set approx. 150 kg)		350 01 110 800
17 Decorative plate in anthracite RAL 7016 for base with castors M4, 180 kg, aluminium composite		350 01 113 920
18 Decorative plate in silk grey RAL 7044 for base with castors M4, 180 kg, aluminium composite NEW		350 01 113 940

³only suitable for smooth, joint free surface coverings

⁶not suitable for cover for M4 base

⁷180 kg: Ground clearance 13 mm

