

Comfort that redefines relaxation.

A summer get-together with friends or family needs a touch of effortlessness – including when you unfurl your parasol. That's why the VITA Torna is ergonomically designed in such a way that it can be opened and adjusted in the blink of an eye – wonderfully simple and totally intuitive.

This parasol from the exclusive VITA Collection is ideal for those who desire the ultimate in comfort combined with timeless, minimalist design.

This ease of use leaves you with more time for the important things: relaxed conversation, a cold drink, and the delightful feeling of sitting in the perfect shade.

VITA® Torna


The ergonomically complete design purist




01/2026 en – 259 422 60 251 © by Glatz AG



Frame	6 or 8 ribs Profiled upper pole 40 × 1.4 mm Profiled lower pole 45 × 1.5 mm
Function	Crank drive for opening and closing Tilt to 32° using a rotary handle 360° rotation using a clamping lever All the operating functions at waist level
Frame colour	Silk grey powder-coated aluminium Anthracite powder-coated aluminium
Canopy	Fabric quality 5: polyacrylic, 300 g/m², UV protection > 98 % Self-tensioning through flexible rib ends
Flounce	Only available without
Protective cover	Included in delivery
Electrical accessories	Osyriion Spot LED with integrated battery pack



Usage locations



Fixation



VITA® Torna
Int. Patents pend. © Int. Design reg.

Valid from 1.1.2026
glatz.com

VITA® Torna 2026 season



Glatz

Assortment

Frame aluminium, powder-coated

Shape	Nominal size	Number of ribs	Order no. silk grey	Order no. anthracite
	cm			
○	Ø 270	8	209 00 270 201	209 00 270 301
	Ø 300	8	209 00 300 201	209 00 300 301
	Ø 330	8	209 00 330 201	209 00 330 301
□	240 x 240	8	209 00 241 201	209 00 241 301
	210 x 150	6	209 00 212 201	209 00 212 301
	250 x 200	6	209 00 252 201	209 00 252 301


Nominal size	Lateral distance	Pole Ø	Area covered	Crank handle height	Height closed	Clear headroom	Clear headroom inclined	Total height	Total height parasol inclined	Foundation	Minimum weight for base	Max. wind speed open
A	AS	M		D	E	F	K	G	L	C	kg	km/h (Bft.)
Ø 270	250	4.5	5.2	90	100	205	130	235	275	50 x 50	40	55 (7)
Ø 300	275	4.5	6.4	90	90	205	120	240	280	60 x 60	40	50 (7)
Ø 330	305	4.5	7.7	90	75	205	115	240	290	60 x 60	55	45 (6)
240 x 240	-	4.5	5.8	90	70	205	135	240	265	50 x 50	40	45 (6)
210 x 150	-	4.5	3.2	90	105	205	160	230	245	50 x 50	30	55 (7)
250 x 200	-	4.5	5.0	90	80	205	150	240	255	50 x 50	40	45 (6)

The listed measures represent extrapolated average values that may be slightly different on the product (± 2 % ± 5 cm).

Height dimensions are based on ground socket BT. These vary slightly depending on the type of base. Except for steel base minus 5 cm.

The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

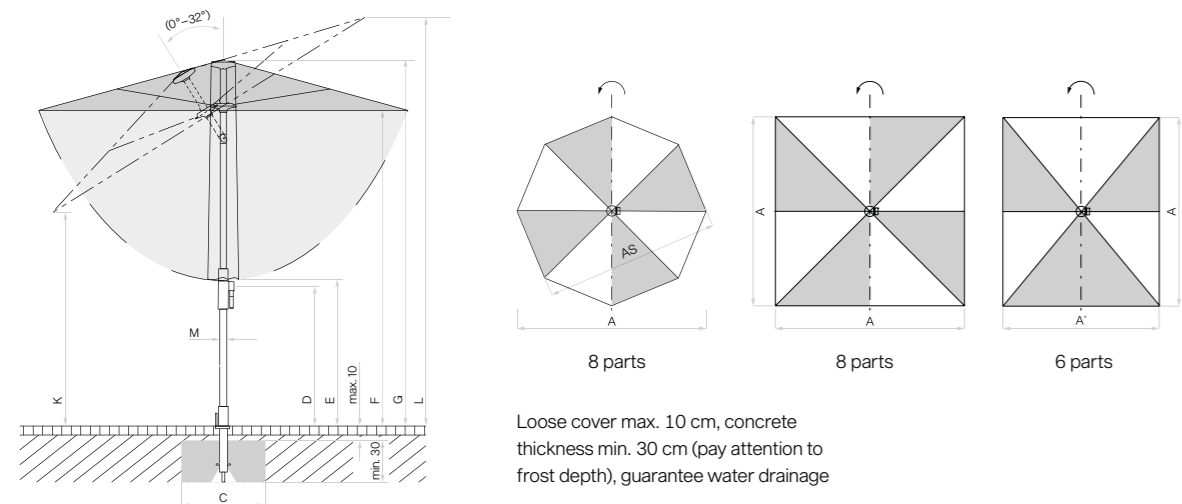

Protective cover	Absolutely necessary	Order no.
Protective cover made of coated, tear-resistant polyester fabric		
1 Protective cover with zip and rod		350 01 609 980
10 pieces, protective cover with zip and rod		350 01 609 974

Accessories

Electrical accessories	Absolutely necessary	Order no.
2 OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3 OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100

Fixations	Absolutely necessary	Order no.
Ground sockets		
4 Ground socket BT, hot-dip galvanised steel	Connection tube BT	350 01 206 100
Wall consoles		
5 Wall bracket Z, 180 mm, hot-dip galvanised steel	Support tube Z	350 01 205 000
Bases		
6 Concrete base Z, 30 kg, Ø 47 × 10 cm, light concrete	Support tube Z	350 01 111 016
6 Concrete base Z, 40 kg, Ø 60 × 8.5 cm, light concrete	Support tube Z	350 01 111 116
1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60 × 8.5 cm, light concrete	Support tube Z	350 01 112 116
Concrete base Z, 55 kg, Ø 60 × 11 cm, light concrete	Support tube Z	350 01 111 216
1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60 × 11 cm, light concrete	Support tube Z	350 01 112 216
1/2 Natural granite base Z, 30 kg, 50 × 33 × 7 cm, natural stone	Support tube Z	350 01 109 480
7 Natural granite base Z, 40 kg, 50 × 50 × 8 cm, natural stone, matt NEW	Support tube Z	350 01 109 432
7 Natural granite base Z, 55 kg, 59 × 59 × 8 cm, natural stone, matt NEW	Support tube Z	350 01 109 434
8 ³ Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel		350 01 109 487
^{3,8} Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304		350 01 109 486
9 Steel base Z 40 kg, 58.5 × 58.5 × 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 810
9 Steel base Z 55 kg, 68.5 × 68.5 × 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 910
10 ³ Set of castors for steel base Z, 40/55 kg, Ø 5 cm, galvanised steel		350 01 101 001
10 ^{3,8} Set of castors for steel base Z, 40/55 kg, Ø 5 cm, high-grade steel 1.4301 / 304		350 01 101 000
Bases with castors		
11 ^{3,7} Base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 200
^{3,7} 1 pallet (5 pieces) base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 280
12 Decorative plate in anthracite RAL 7016 for base with castors Z, 55 kg, aluminium composite		350 01 113 320
13 Decorative plate in silk grey RAL 7044 for base with castors Z, 55 kg, aluminium composite NEW		350 01 114 340
Various fixation types		
14 Lawn spike Z, 85 × 150 × 350 mm, hot-dip galvanised steel	Support tube Z	350 01 205 400
Support tubes/connection tubes		
15 Support tube Z, internal, Ø 40 / 37 mm, hot-dip galvanised steel		350 01 201 610
16 Connection tube BT, internal, Ø 40/37 mm, hot-dip galvanised steel, incl. cover anthracite		350 01 201 830
17 Connection tube BT, internal, Ø 40/37 mm, hot-dip galvanised steel, incl. cover silk grey NEW		350 01 201 820

³only suitable for smooth, joint free surface coverings

⁷55 kg: Ground clearance 7 mm

⁸suitable for corrosive environments

