



FORTELLO® Pro

The large-size windproof parasol

NEW



Unique selling proposition

- F-line Pro design language: uniform design of the models Fortello Pro, Fortero Pro and Fortino Pro
- Continuous mast profile down to the floor covering (internal support tube)
- Counter-rotating opening principle:
Quick and easy operation using tensioning lever
High closing height (no need to move the furniture)
- 80 km/h wind stability at size 350 × 350 cm
- Top quality material selection
- Integrated LED lighting with battery pack (no power cable) (only available on model 2025, not on Pro version)
- Quickship program available

Places of use

- Small area outdoors
- Terraces & rooftops
- Public spaces & parks
- **NEW** Corrosive environments





FORTELLO® Pro

The large-size windproof parasol

NEW

Basic model

Frame

- 8 parts made from anodised aluminium
- Profiled two-part mast
- Mast profile Ø 67 mm and 3 mm wall thickness
- Roof struts 20 × 33 mm

Frame material

- Aluminium: EN-AW-6063-T5
- Screws and rivets made from stainless steel A4
- Glass-fibre reinforced plastic parts: PA6GF30
- Anodisation:
 - Profile surface finishing
 - High degree of hardness – wear resistance (“scratch-resistant”)
 - Increased corrosion resistance
 - Natural appearance (adaptation to environment)
 - Modern look (luxurious matt)

Frame colour

- Anodised natural matt

Opening principle

- Counter-rotating (telescopic system)
- Fast opening thanks to slide and tensioning lever

Canopy

- Without flounce (flounce for a surcharge)
- Self-tautening thanks to the flexible strut ends
- Available in 3 fabric qualities:
 - 100 % polyacrylic approx. 300 g/m² (spun dyed)
 - 100 % polyester approx. 250 g/m² (spun dyed)
 - 100 % polyester approx. 220 g/m² (piece dyed)
- Replaceable or interchangeable canopies

Wind stability

- Up to 80 km/h (with fixed anchorage)
- Tested in a wind tunnel

Fixations

[More information](#)

- Bases / parasol stands / covers
- Ground sockets
- Mounting plates without or with installation height made to measure
- Mounting plates for insulation floors
- Glatz Concrete Cube M4/M8/M16
- Base plates made to measure

Additional options – Standard accessories


[More information](#)

- LED lighting with battery pack
(only available on model 2025, not on Pro version)
(Not suitable for corrosive environments)
- Protective cover


Special product solutions – Made to measure

[More information](#)

- Mast extensions & reductions
max. + 300 mm / - 275 mm
- Glatz Green® Special fabric
- Special fabrics (third-party fabrics, flame retardant)
- Custom flounces & edging strips
- Printing & advertising print

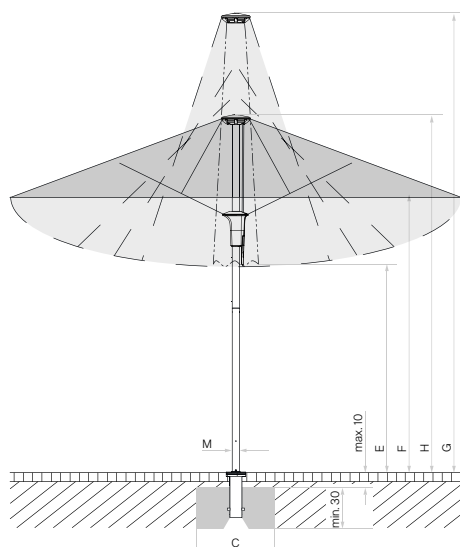

Loose cover max. 10 cm, concrete
thickness min. 30 cm (pay attention to
frost depth), guarantee water drainage

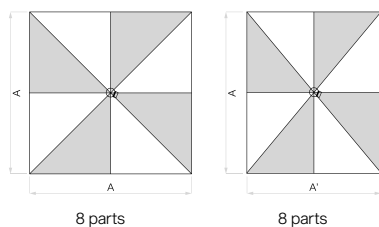

Nominal size	Lateral distance	Mast Ø	Area covered	Height closed	Clear headroom	Total height	Height open	Foundation	Minimum weight for base	max. wind speed open
cm	cm	cm	m²	cm	cm	cm	cm	cm	kg	km/h (Bft.)
A	AS	M		E	F	G	H	C		
350 x 350	-	6.7	12.3	96	215	342	260	80 x 80	120	80 (9)
400 x 400	-	6.7	16.0	80	215	362	268	90 x 90	180	70 (8)
400 x 300	-	6.7	12.0	86	215	334	260	80 x 80	120	80 (9)

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

The height dimensions are based on the ground socket M4. With the base M4, 120 kg these vary by plus 11.5 cm and with the base M4, 180 kg by plus 15.5 cm. With the natural granite base, 120 kg these vary by plus 9.5 cm and with the natural granite base with set of castors by plus 14 cm.

Using PX ground socket with adapter on M4 leaves an additional 10.5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.



Glatz AG

+41 52 723 66 44
 contract@glatz.com
 glatz.com

