

FORTERO®




The medium-size windproof favourite
for cafés and restaurants



Glatz 





Assortment


	Nominal size without flounce	Number of ribs	Order no. Frame anodised natural
	cm		
	Ø 350	8 parts	320 00 350 171
	250×250	8 parts	320 00 251 171
	300×300	8 parts	320 00 301 171
	350×350	8 parts	320 00 351 171
	300×200	8 parts	320 00 302 171
	350×250	8 parts	320 00 352 171

Nominal size	Lateral distance	Mast Ø	Area covered	Height closed	Clear headroom	Total height	Height open	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m²	cm	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	E	F	G	H	C		
Ø 350	325	5.5	8.7	125	205	310	260	70×70	90	55 (7)
250×250	-	5.5	6.3	110	205	295	255	70×70	70	70 (8)
300×300	-	5.5	9.0	95	205	315	260	70×70	90	60 (7)
350×350	-	5.5	12.3	85	205	345	270	80×80	120	50 (7)
300×200	-	5.5	6.0	120	205	310	260	70×70	70	65 (8)
350×250	-	5.5	8.8	110	205	335	270	70×70	90	55 (7)


The listed measures represent extrapolated average values that may be slightly different on the product (± 2 % ± 5 cm).
Height dimensions are based on ground socket M4. If one of the offered bases is used, these measures raise by 11.5–15.5 cm.
Using PX ground socket with connecting tube leaves an additional 10.5 cm.
The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.
In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

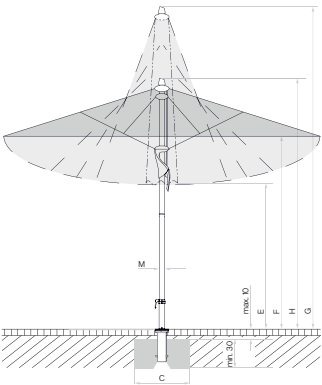

8 parts



8 parts



8 parts

Loose cover max. 10 cm, concrete thickness
min. 30 cm (pay attention to frost depth), Guarantee
water drainage

Accessories		Absolutely necessary	Order no.
Protective cover made of coated, tear-resistant polyester fabric			
1	Protective cover with zip and rod		350 01 609 981
Electrical accessories			
2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100
Fixations			
Ground sockets			
4	Ground socket PX, hot-dip galvanised steel	Connection tube PX	350 01 207 001
4	Ground socket PX, high-grade steel 1.4301 / 304	Connection tube PX	350 01 207 011
5	Ground socket M4, hot-dip galvanised steel	Support tube M4	350 01 226 510
Mounting plates			
6	Mounting plate M4 / M8, 30 × 30 × 1.5 cm, hot-dip galvanised steel	Support tube M4	350 01 226 921
7	Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	Support tube M4	350 01 226 932
8	Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	Support tube M4	350 01 226 930
	Mounting plate M4 for isolated grounds, installation height made to measure, high-grade steel 1.4301 / 304	Support tube M4	350 01 229 730
Wall consoles			
9	Wall console M4, extension 480 mm, hot-dip galvanised steel	Support tube M4	350 01 229 405
10	Wall console M4, extension 100 mm, hot-dip galvanised steel	Support tube M4	350 01 229 410



Fixations		Absolutely necessary	Order no.
Bases			
11	Concrete base Z, 70 kg, Ø 75 × 9 cm, light concrete ^{NEW}	Support tube Z	350 01 111 316
	¹ Concrete base Z, 70 kg, Ø 75 × 9 cm	Support tube Z	350 01 109 527
11	Concrete base Z, 90 kg, Ø 75 × 11 cm, light concrete ^{NEW}	Support tube Z	350 01 111 416
	1 pallet (10 pieces) concrete base Z, 90 kg, Ø 75 × 11 cm, light concrete ^{NEW}	Support tube Z	350 01 112 416
	¹ Concrete base Z, 90 kg, Ø 75 × 11 cm	Support tube Z	350 01 109 523
	¹ 1 pallet (10 pieces) concrete base Z, 90 kg, Ø 75 × 11 cm	Support tube Z	350 01 109 535
12	Natural granite base Z, 90 kg, 64 × 64 × 9 cm, natural stone	Support tube Z	350 01 109 515
	¹ Steel base Z 40 kg, 58.5 × 58.5 × 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 210
	¹ Add-on weight 30 kg, 57.5 × 57.5 × 1.7 cm, hot-dip galvanised steel		350 01 100 310
13	Base frame M4, 120 kg, (for 8 plates 40 × 40 × 4 cm), 91 × 91 × 11.5–15.5 cm, hot-dip galvanised steel, adjustable and levellable (price without plates)	Support tube M4	350 01 108 235
	Slab set, 8 pieces, 40 × 40 × 4 cm, (approx. 110 kg), concrete		350 01 226 908
	Slab set, 8 pieces, 40 × 40 × 4 cm, (approx. 115 kg), 4 pieces concrete, 4 pieces in granite-look		350 01 226 909
14	Cover for M4 base 120 kg, 96 × 96 × 11.5 cm, plastic ABS coated, anodised aluminium look		350 01 100 617
15	Cover for M4 base 120 kg, 96 × 96 × 11.5 cm, plastic ABS coated, anthracite		350 01 100 630
	^{3,6} Set of castors for base M4 120 kg / 180 kg, (maximum weight 240 kg), Ø 5 cm, H = 5.5 cm, galvanised steel		350 01 100 500
Bases with castors			
16	³ Base with castors Z, 90 kg, 80 × 80 × 11 cm, light concrete (without decorative plate)	Support tube Z + Decorative plate	350 01 113 400
	³ 1 pallet (5 pieces) base with castors Z, 90 kg, 80 × 80 × 11 cm, light concrete (without decorative plate)	Support tube Z + Decorative plate	350 01 113 480
	Decorative plate in grey white RAL 9002 for base with castors Z, 90 kg, aluminium composite		350 01 113 510
	Decorative plate in anthracite RAL 7016 for base with castors Z, 90 kg, aluminium composite		350 01 113 520
17	³ Base frame with castors M4, 120 kg, 80 × 80 × 14.6 cm, hot-dip galvanised steel, white RAL 9016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4 + Decorative plate	350 01 113 610
18	³ Base frame with castors M4, 120 kg, 80 × 80 × 14.6 cm, hot-dip galvanised steel, anthracite RAL 7016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4 + Decorative plate	350 01 113 620
	Weight Set for base with castors M4, 120 kg, 4 pieces, concrete, (Weight Set approx. 90 kg)		350 01 110 500
	Decorative plate in grey white RAL 9002 for base with castors M4, 120 kg, aluminium composite		350 01 113 710
	Decorative plate in anthracite RAL 7016 for base with castors M4, 120 kg, aluminium composite		350 01 113 720
19	³ Natural granite base M4, 120 kg, 90 × 90 × 17 cm, natural stone, with castors	Support tube M4	350 01 109 475
	^{1,3} Base frame with castors M4, 150 kg, 80 × 80 × 14 cm, hot-dip galvanised steel	Weight Set + Support tube M4	350 01 103 000
	¹ Cast concrete decor weights set, 4 pieces 25101104500 (approx. 125 kg) for 350 01 103 000		350 01 103 100
Support tubes/Connection tubes			
20	Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 201 210
	Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 201 300
21	Support tube M4, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 200 035
22	Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 206 001
	Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 206 011

¹ while stocks last

³ only suitable for smooth, joint free surface coverings

⁶ Not suitable for cover for M4 base



21



22



Frame	<p>8 parts</p> <p>Two-part profiled mast 55 × 2.5 mm</p> <p>Opposite opening principle for easy opening</p> <p>Closable over covered tables (85–125 cm)</p> <p>Runner and crown made from robust die-cast aluminium</p> <p>Screws and rivets made from stainless steel</p> <p>Canopy self-tensing through flexible rib ends</p> <p>Frame roof: round, square, rectangular</p>
Frame colour	Natural anodised aluminium
Canopy	<p>Fabric Quality 5: polyacrylic, 300 g/m², UV protection > 98 %</p> <p>Fabric Quality 4: polyester, 250 g/m², UV protection > 98 %</p> <p>Fabric Quality 2: polyester, 220 g/m², UV protection > 98 %</p>
Flounce	Only available without
Protective cover	Can be ordered as an optional extra
Electrical accessories	Osyrion Spot LED with integrated battery pack



Using Locations



Fixations



FORTERO®,
© Int. Design reg.

Valid from 1.1.2024
glatz.com