

PIAZZINO

The long-lasting wooden parasol






Assortment

	Nominal size without flounce	Number of ribs	Order no. clear finish	Order no. painted red
○	cm			
	Ø 300	8 parts	173 00 300 751	172 00 300 751
	Ø 350	8 parts	173 00 350 751	172 00 350 751
□	300 × 300	8 parts	173 00 301 751	172 00 301 751

Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m²	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	E	F	G	C		
Ø 300	275	4.8	6.4	95	205	260	60 × 60	40	30 (5)
Ø 350	325	4.8	8.7	80	205	270	60 × 60	55	30 (5)
300 × 300	-	4.8	9.0	50	205	275	60 × 60	55	30 (5)

The listed measures represent extrapolated average values that may be slightly different on the product (± 2% ± 5 cm).
The height dimensions are based on the ground socket PX (structure 15 cm). In the base variations these might differ slightly. Apart from the steel base minus 7.5 cm.
The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.
In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

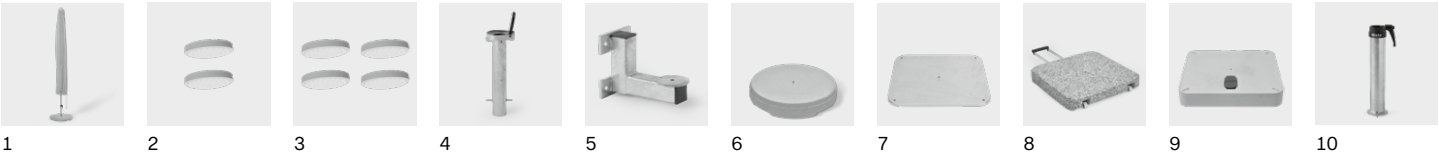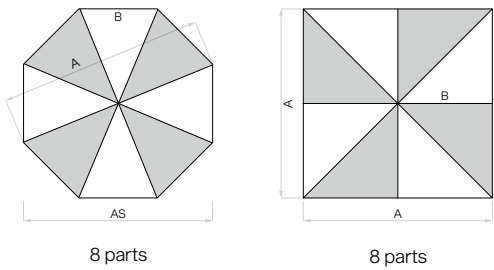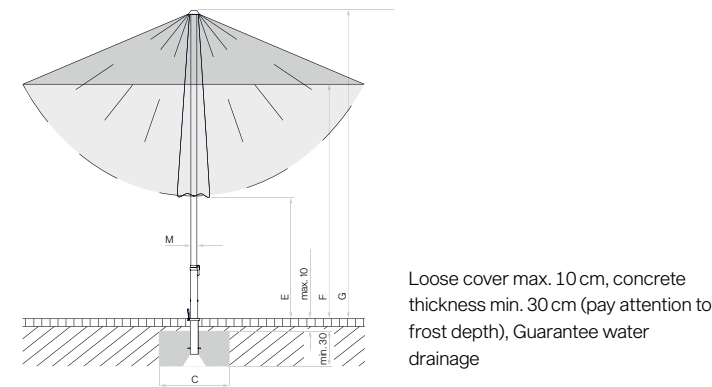

Accessories

**Absolutely
necessary**

Order no.

Protective cover made of coated, tear-resistant polyester fabric

1	Protective cover with zip and rod		350 01 609 978
---	-----------------------------------	--	----------------

Electrical accessories

2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100

Fixations

Ground sockets

4	Ground socket PX, hot-dip galvanised steel	Connection tube PX	350 01 207 001
4	Ground socket PX, high-grade steel 1.4301 / 304	Connection tube PX	350 01 207 011

Wall consoles

5	Wall bracket Z, 180 mm, hot-dip galvanised steel	Support tube Z	350 01 205 000
---	--------------------------------------------------	----------------	----------------

Bases

6	Concrete base Z, 40 kg, Ø 60 × 8.5 cm, light concrete ^{NEW}	Support tube Z	350 01 111 116
	1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60 × 8.5 cm, light concrete ^{NEW}	Support tube Z	350 01 112 116
	¹ Concrete base Z, 40 kg, Ø 60 × 8.5 cm	Support tube Z	350 01 109 529
	¹ 1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60 × 8.5 cm	Support tube Z	350 01 109 533
6	Concrete base Z, 55 kg, Ø 60 × 11 cm, light concrete ^{NEW}	Support tube Z	350 01 111 216
	1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60 × 11 cm, light concrete ^{NEW}	Support tube Z	350 01 112 216
	¹ Concrete base Z, 55 kg, Ø 60 × 11 cm	Support tube Z	350 01 109 528
	¹ 1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60 × 11 cm	Support tube Z	350 01 109 534
7	Steel base Z 40 kg, 58.5 × 58.5 × 2 cm, hot-dip galvanised steel ^{NEW}	Support tube Z	350 01 100 810
	¹ Steel base Z 40 kg, 58.5 × 58.5 × 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 210
7	Steel base Z 55 kg, 68.5 × 68.5 × 2 cm, hot-dip galvanised steel ^{NEW}	Support tube Z	350 01 100 910

Bases with castors

8	³ Natural granite base Z, 40 kg, 45 × 45 × 8 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 465
8	³ Natural granite base Z, 55 kg, 55 × 55 × 9 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 445
9	³ Base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate)	Support tube Z + Decorative plate	350 01 113 200
	³ 1 pallet (5 pieces) base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate)	Support tube Z + Decorative plate	350 01 113 280
	Plaque décorative blanc gris RAL 9002 pour socle à roulettes Z, 55 kg, composite d'aluminium		350 01 113 310
	Decorative plate in anthracite RAL 7016 for base with castors Z, 55 kg, aluminium composite		350 01 113 320

Support tubes/Connection tubes

10	Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 201 210
10	Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 201 282
10	Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 201 300
11	Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 206 001
12	Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 206 082
11	Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 206 011

¹ while stocks last

³ only suitable for smooth, joint free surface coverings



11




12



Frame	<p>8 parts</p> <p>Full-length pole Ø 48 mm</p> <p>Pulley system for opening and closing, fixed with a metal pin</p> <p>Fabric corners reinforced with (white) leather</p> <p>Frame roof: round, square</p>
Frame colour	<p>Fabric Quality 5, 4: colourless-varnished eucalyptus wood</p> <p>Fabric Quality 2: red-varnished eucalyptus wood</p>
Canopy	<p>Fabric Quality 5: polyacrylic, 300 g/m², UV protection > 98 %</p> <p>Fabric Quality 4: polyester, 250 g/m², UV protection > 98 %</p> <p>Fabric Quality 2: polyester, 220 g/m², UV protection > 98 %</p>
Flounce	Only available without
Protective cover	Included in delivery
Electrical accessories	Osyrion Spot LED with integrated battery pack



Using Locations



Fixations



Valid from 1.1.2024
glatz.com