



FORTELLO® Pro



01/2026 en – 259 42 260 121 © by Glatz AG



Frame	8 ribs Aluminium Two-part profiled mast 67 × 3 mm Runner and crown made from corrosion resistant, fibreglass reinforced plastic Screws and rivets made from stainless steel
Function	Quick opening and closing with the tensioning lever Opposing opening principle for easy opening and high closing height
Frame colour	Natural anodised aluminium
Canopy	Fabric Quality 5: polyacrylic, 300 g/m², UV protection > 98 % Fabric Quality 4: polyester, 250 g/m², UV protection > 98 % Fabric Quality 2: polyester, 220 g/m², UV protection > 98 % Self-tensioning through flexible rib ends
Flounce	Available on request
Protective cover	Can be ordered as an optional extra
Electrical accessories	Osyron Spot LED with integrated battery pack



Usage locations



Fixation





FORTELLO® Pro
Int. Patents pend. © Int. Design reg.

Valid from 1.1.2026
glatz.com





Assortment

Frame aluminium, anodised natural

Shape	Nominal size	Number of ribs	Order no.							
	cm									
	350 x 350	8	326 00 351 171							
	400 x 400	8	326 00 401 171							
	400 x 300	8	326 00 402 171							

Nominal size	Lateral distance	Mast Ø	Area covered	Height closed	Clear headroom	Total height	Height open	Foundation	Minimum weight for base	Max. wind speed open
cm	cm	cm	m²	cm	cm	cm	cm	cm	kg	km/h (Bft.)
A	AS	M		E	F	G	H	C		
350 x 350	-	6.7	12.3	96	215	342	260	80 x 80	120	80 (9)
400 x 400	-	6.7	16.0	80	215	362	268	90 x 90	180	70 (8)
400 x 300	-	6.7	12.0	86	215	334	260	80 x 80	120	80 (9)

The listed measures represent extrapolated average values that may be slightly different on the product (± 2 % ± 5 cm).
The height dimensions are based on the ground socket M4. With the base M4, 120 kg these vary by plus 11.5 cm and with the base M4, 180 kg by plus 15.5 cm. With the natural granite base, 120 kg these vary by plus 9.5 cm and with the natural granite base with set of castors by plus 14 cm.
Using PX ground socket with adapter on M4 leaves an additional 10.5 cm.
The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.
In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

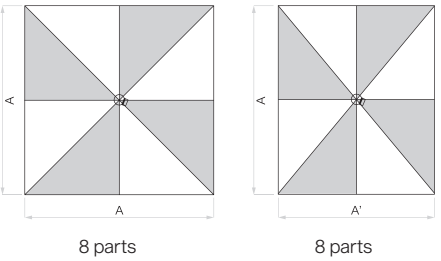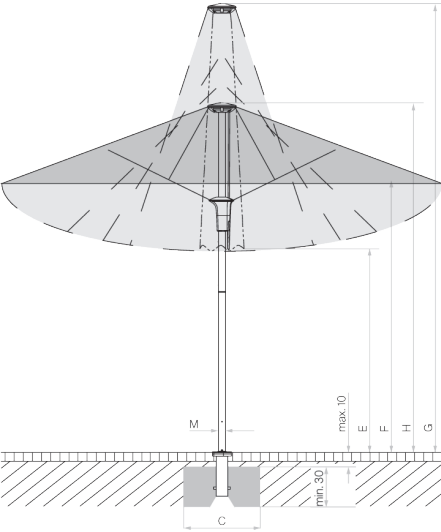

Accessories FORTELLO® Pro

Protective cover	Absolutely necessary	Order no.
Protective cover made of coated, tear-resistant polyester fabric		
1 Protective cover with zip and rod ripstop ^{NEW}		350 01 609 704


Accessories		
Electrical accessories		
2 OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3 OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100

Fixations		
Ground sockets		
4 Ground socket PX, hot-dip galvanised steel	Adapter PX to M4 + Support tube M4, P*	350 01 207 001
5 Ground socket M4, hot-dip galvanised steel	Support tube M4, P*	350 01 226 510

Adapters		
6 Adapter PX to M4, hot-dip galvanised steel	Support tube M4, P*	350 01 221 800

Mounting plates		
7 Mounting plate M4 / M8, 30×30×1.5 cm, hot-dip galvanised steel	Support tube M4, P*	350 01 226 921
8 Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	Support tube M4, P*	350 01 226 932
9 Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	Support tube M4, P*	350 01 226 930
10 Mounting plate M4 for high insulation (50-350 mm), installation height (50-350 mm) made to measure (higher on request), hot-dip galvanised steel	Support tube M4, P*	350 01 222 510

Wall consoles		
11 Wall console M4, extension 480 mm, hot-dip galvanised steel	Support tube M4, P*	350 01 229 405
12 Wall console M4, extension 100 mm, hot-dip galvanised steel (Not suitable for Turnable adapter M4 for M4)	Support tube M4, P*	350 01 229 410

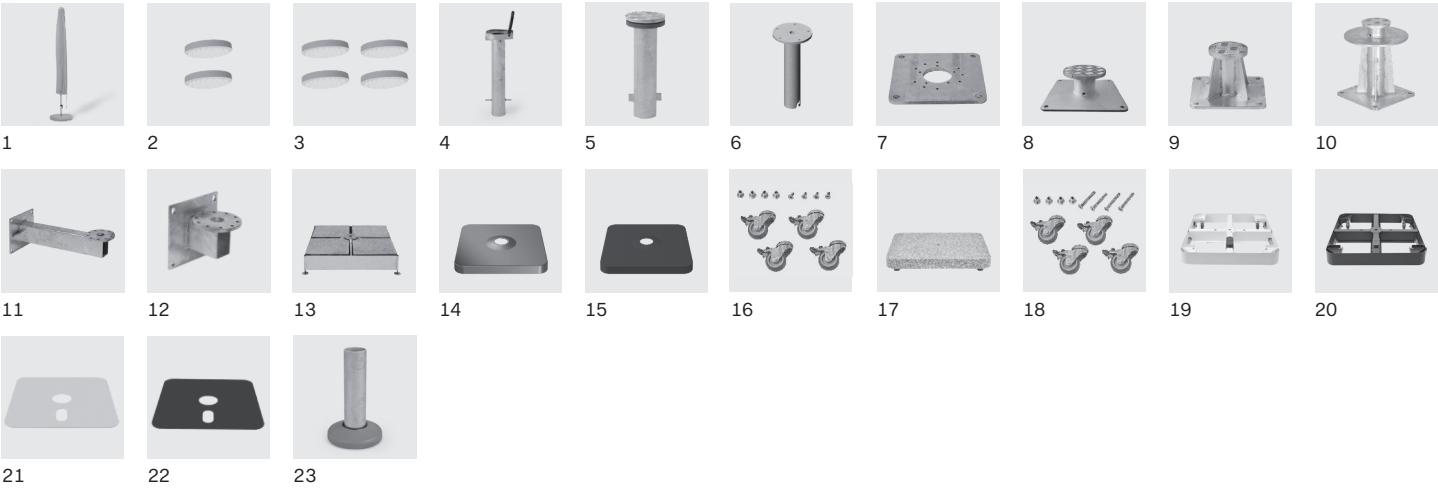

Accessories FORTELLO® Pro

Fixations	Absolutely necessary	Order no.
Bases		
13 Base frame M4, 120 kg, (for 8 plates 40×40×4 cm), 91×91×11.5–15.5 cm, hot-dip galvanised steel, adjustable and levellable (price without plates)	Support tube M4, P*	350 01 108 235
Slab set, 8 pieces, 40×40×4 cm, (approx. 110 kg), concrete		350 01 226 908
Slab set, 8 pieces, 40×40×4 cm, (approx. 115 kg), 4 pieces concrete, 4 pieces in granite-look		350 01 226 909
14 Cover for M4 base 120 kg, 96×96×11.5 cm, plastic ABS coated, anodised aluminium look		350 01 100 617
15 Cover for M4 base 120 kg, 96×96×11.5 cm, plastic ABS coated, anthracite		350 01 100 630
13 Base frame M4, 180 kg, (for 12 plates 40×40×4 cm), 91×91×15.5–19.5 cm, hot-dip galvanised steel, adjustable and levellable (price without plates)	Support tube M4, P*	350 01 108 335
Slab set, 12 pieces, 40×40×4 cm, (approx. 165 kg), concrete		350 01 226 907
Slab set, 12 pieces, 40×40×4 cm, (approx. 170 kg), 8 pieces concrete, 4 pieces in granite-look		350 01 226 906
14 Cover for M4 base 180 kg, 96×96×15 cm, plastic ABS coated, anodised aluminium look		350 01 100 717
15 Cover for M4 base 180 kg, 96×96×15 cm, plastic ABS coated, anthracite		350 01 100 730
16 ^{3,6} Set of castors for base M4 120 kg / 180 kg, (maximum weight 240 kg), Ø 5 cm, H = 5.5 cm, galvanised steel		350 01 100 500
17 ¹ Natural granite base M4, 120 kg, 87 x 87 x 9.5 cm, natural stone	Support tube M4, P*	350 01 109 495
17 Natural granite base M4, 120 kg, 87 x 87 x 9.5 cm, natural stone, matt ^{NEW}	Support tube M4, P*	350 01 109 438
18 ² Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel		350 01 109 487
18 ^{3,8} Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304		350 01 109 486

Bases with castors		
19 ^{1,3,7} Base frame with castors M4, 90/120 kg, 80 × 80 × 14.6 cm, hot-dip galvanised steel, white RAL 9016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4, P* + decorative plate	350 01 113 610
20 ^{3,7} Base frame with castors M4, 90/120 kg, 80 × 80 × 14.6 cm, hot-dip galvanised steel, anthracite RAL 7016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4, P* + decorative plate	350 01 113 620
Weight Set for base with castors M4, 90/120 kg, 4 pieces, concrete, (Weight Set approx. 90 kg)		350 01 110 500
21 ¹ Decorative plate in grey white RAL 9002 for base with castors M4, 90/120 kg, aluminium composite		350 01 113 710
22 Decorative plate in anthracite RAL 7016 for base with castors M4, 90/120 kg, aluminium composite		350 01 113 720
19 ^{1,3,7} Base frame with castors M4, 180 kg, 94 × 94 × 14.6 cm, hot-dip galvanised steel, white RAL 9016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4, P* + decorative plate	350 01 113 810
20 ^{3,7} Base frame with castors M4, 180 kg, 94 × 94 × 14.6 cm, hot-dip galvanised steel, anthracite RAL 7016, frame approx. 30 kg (without decorative plate)	Weight Set + Support tube M4, P* + decorative plate	350 01 113 820
Weight Set for base with castors M4, 180 kg, 4 pieces, concrete, (Weight Set approx. 150 kg)		350 01 110 800
21 ¹ Decorative plate in grey white RAL 9002 for base with castors M4, 180 kg, aluminium composite		350 01 113 910
22 Decorative plate in anthracite RAL 7016 for base with castors M4, 180 kg, aluminium composite		350 01 113 920

Support tubes/connection tubes		
23 Support tube M4, P*, hot-dip galvanised steel (with cover, adjustable and levellable)		350 01 200 235

¹while stocks last
³only suitable for smooth, joint free surface coverings
⁶not suitable for cover for M4 base
⁷120 kg / 180 kg: Ground clearance 13 mm
⁸suitable for corrosive environments