

FORTERO® Pro



FORTERO® Pro

The medium-size windproof
favourite for cafés and restaurants

01/2026 en - 259 422 501 01 © by Glatz AG



> 98 %
UV
Protection



Frame	8 ribs Aluminium Two-part profiled mast 55 x 2.5 mm Runner and crown made from corrosion resistant, fibreglass reinforced plastic Screws and rivets made from stainless steel
Function	Quick opening and closing with the tensioning lever Opposing opening principle for easy opening and high closing height
Frame colour	Natural anodised aluminium
Canopy	Fabric Quality 5: polyacrylic, 300 g/m ² , UV protection > 98 % Fabric Quality 4: polyester, 250 g/m ² , UV protection > 98 % Fabric Quality 2: polyester, 220 g/m ² , UV protection > 98 % Self-tensioning through flexible rib ends
Flounce	Available on request
Protective cover	Can be ordered as an optional extra
Electrical accessories	Osyriion Spot LED with integrated battery pack



Usage locations



Fixation



Valid from 1.1.2026
glatz.com
FORTERO® Pro
Int. Patents pend. ©Int. Design reg.

Glatz *

Assortment

Frame aluminium, anodised natural

Shape	Nominal size	Number of ribs	Order no.
cm			
Ø	Ø 350	8	321 00 350 171
□	300 x 300	8	321 00 301 171
□	350 x 350	8	321 00 351 171
□	300 x 200	8	321 00 303 171
□	350 x 250	8	321 00 352 171

Nominal size	Lateral distance	Mast Ø	Area covered	Height closed	Clear headroom	Total height	Height open	Foundation	Minimum weight for base	Max. wind speed open
cm	cm	cm	m ²	cm	cm	cm	cm	kg	km/h (Bft.)	
A	AS	M		E	F	G	H	C		
Ø 350	325	5.5	8.7	133	215	310	257	70 x 70	90	55 (7)
300 x 300	-	5.5	9.0	106	215	318	255	70 x 70	90	60 (7)
350 x 350	-	5.5	12.3	82	215	331	262	80 x 80	120	50 (7)
300 x 200	-	5.5	6.0	125	215	305	251	70 x 70	70	65 (8)
350 x 250	-	5.5	8.8	104	215	319	255	70 x 70	90	55 (7)


The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5\text{ cm}$).

Using PX ground socket with connecting tube leaves an additional 10.5 cm.


Height dimensions are based on ground socket M4. If one of the offered bases is used, these measures raise by 9.5–16 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

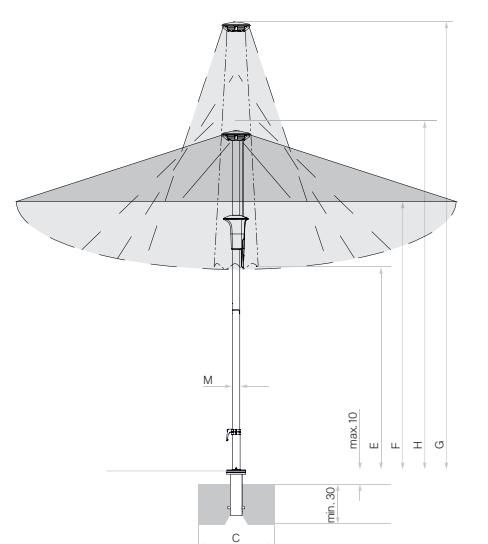

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), guarantee water drainage

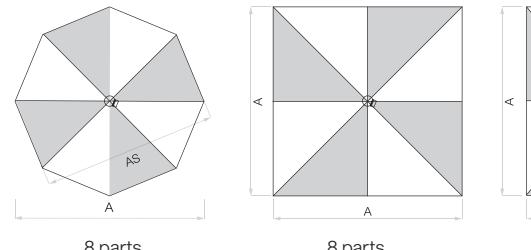

8 parts

8 parts

8 parts



Accessories FORTERO® Pro

Protective cover

Protective cover made of coated, tear-resistant polyester fabric

1 Protective cover with zip and rod ripstop to FORTERO Pro, Ø 350, 300 x 300, 300 x 200, 350 x 250 cm	350 01 609 705
1 Protective cover with zip and rod ripstop to FORTERO Pro, 350 x 350 cm	350 01 609 704

Accessories

Electrical accessories

2 OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger	350 01 563 000
3 OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger	350 01 563 100

Accessories FORTERO® Pro

Fixations

Ground sockets

4 Ground socket PX, hot-dip galvanised steel	Connection tube PX	350 01 207 001
4 Ground socket PX, high-grade steel 1.4301 / 304	Connection tube PX	350 01 207 011
5 Ground socket M4, hot-dip galvanised steel	Support tube M4	350 01 226 510

Mounting plates

6 Mounting plate M4/M8, 30 x 30 x 1.5 cm, hot-dip galvanised steel	Support tube M4	350 01 226 921
7 Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	Support tube M4	350 01 226 932
8 Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	Support tube M4	350 01 226 930
9 Mounting plate M4 for high insulation (50–350 mm), installation height (50–350 mm) made to measure (higher on request), hot-dip galvanised steel	Support tube M4	350 01 222 510

Wall consoles

10 Wall console M4, extension 480 mm, hot-dip galvanised steel	Support tube M4	350 01 229 405
11 Wall console M4, extension 100 mm, hot-dip galvanised steel (Not suitable for Turnable adapter M4 for M4)	Support tube M4	350 01 229 410

Bases

12 Concrete base Z, 70 kg, Ø 75 x 9 cm, light concrete	Support tube Z	350 01 111 316
12 Concrete base Z, 90 kg, Ø 75 x 11 cm, light concrete	Support tube Z	350 01 111 416
1 pallet (10 pieces) concrete base Z, 90 kg, Ø 75 x 11 cm, light concrete	Support tube Z	350 01 112 416
13 Base frame M4, 120 kg, (for 8 plates 40 x 40 x 4 cm), 91 x 91 x 11.5–15.5 cm, hot-dip galvanised steel, adjustable and levelable (price without plates)	Support tube M4	350 01 108 235
Slab set, 8 pieces, 40 x 40 x 4 cm, (approx. 110 kg), concrete		350 01 226 908
Slab set, 8 pieces, 40 x 40 x 4 cm, (approx. 115 kg), 4 pieces concrete, 4 pieces in granite-look		350 01 226 909
14 Cover for M4 base 120 kg, 96 x 96 x 11.5 cm, plastic ABS coated, anodised aluminium look		350 01 100 617
15 Cover for M4 base 120 kg, 96 x 96 x 11.5 cm, plastic ABS coated, anthracite		350 01 100 630
3 ⁶ Set of castors for base M4 120 kg / 180 kg, (maximum weight 240 kg), Ø 5 cm, H = 5.5 cm, galvanised steel		350 01 100 500
16 Natural granite base Z, 90 kg, 75 x 75 x 8 cm, natural stone, matt	Support tube Z	350 01 109 436
17 ¹ Natural granite base M4, 120 kg, 87 x 87 x 9.5 cm, natural stone, matt	Support tube M4	350 01 109 495
17 ¹ Natural granite base M4, 120 kg, 87 x 87 x 9.5 cm, natural stone, matt	Support tube M4	350 01 109 438
18 ^{3,7} Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel		350 01 109 487
18 ^{3,7} Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304		350 01 109 486

Bases with castors

19 ^{3,7} Base with castors Z, 90 kg, 80 x 80 x 11 cm, light concrete	Support tube Z	350 01 113 400
20 ^{3,7} 1 pallet (5 pieces) base with castors Z, 90 kg, 80 x 80 x 11 cm, light concrete	Support tube Z	350 01 113 480
20 ^{1,3,7} Base frame with castors M4, 90/120 kg, 80 x 80 x 14.6 cm, hot-dip galvanised steel, white RAL 9016, frame approx. 30 kg (without decorative plate)	Container Set/Weight Set	350 01 113 610
21 ^{3,7} Base frame with castors M4, 90/120 kg, 80 x 80 x 14.6 cm, hot-dip galvanised steel, anthracite RAL 7016, frame approx. 30 kg (without decorative plate)	Container Set/Weight Set	350 01 113 620

Weight Set for base with castors M4, 90/120 kg, 4 pieces, concrete, (Weight Set approx. 90 kg)

Container Set for base with castors M4, 90/120 kg, 4 pieces, plastic, (filled approx. 56 kg)

22 ¹Decorative plate in grey white RAL 9002 for base with castors M4, 90/120 kg, aluminium composite

23 Decorative plate in anthracite RAL 7016 for base with castors M4, 90/120 kg, aluminium composite

Support tubes/connection tubes

24 Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 201 210
24 Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 201 300
25 Support tube M4, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 200 035
26 Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 206 001
26 Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.43		