

FORTINO® Pro



01/2026 en - 259 42 260 111 © by Glatz AG

FORTINO® Pro

The compact windproof parasol

> 98 %
UV
Protection



Frame	8 ribs Aluminium Two-part profiled pole 38.4 x 2 mm Runner and crown made from corrosion resistant, fibreglass reinforced plastic Screws and rivets made from stainless steel
Function	Quick opening and closing with the tensioning lever Opposing opening principle for easy opening and high closing height
Frame colour	Natural anodised aluminium
Canopy	Fabric Quality 5: polyacrylic, 300 g/m ² , UV protection > 98 % Fabric Quality 4: polyester, 250 g/m ² , UV protection > 98 % Fabric Quality 2: polyester, 220 g/m ² , UV protection > 98 % Self-tensioning through flexible rib ends
Flounce	Available on request
Protective cover	Can be ordered as an optional extra
Electrical accessories	Osyrian Spot LED with integrated battery pack



Usage locations



Fixation



FORTINO® Pro
Int. Patents pend. ©Int. Design reg.

Valid from 1.1.2026
glatz.com

Glatz *

Assortment

Frame aluminium, anodised natural

Shape	Nominal size	Number of ribs	Order no.
cm			
○	Ø 250	8	312 00 250 171
	Ø 300	8	312 00 300 171
□	200 x 200	8	312 00 201 171
	250 x 250	8	312 00 251 171

Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Height open	Foundation	Minimum weight for base	Max. wind speed open
cm	cm	cm	m ²	cm	cm	cm	cm	cm	kg	km/h (Bft.)
A	AS	M	E	F	G	H	C			
Ø 250	230	3.8	4.4	150	205	277	236	60 x 60	40	80 (9)
Ø 300	275	3.8	6.4	139	205	291	242	70 x 70	55	60 (7)
200 x 200	-	3.8	4	135	205	277	233	60 x 60	40	70 (8)
250 x 250	-	3.8	6.3	115	205	293	240	70 x 70	55	55 (7)


The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5\text{ cm}$).

Height dimensions are based on ground socket BT. These vary slightly depending on the type of base. Except for steel base minus 5 cm.



For the variants with a mounting plate and the M4-to-Z adapter, the specified heights are reduced by 4–5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

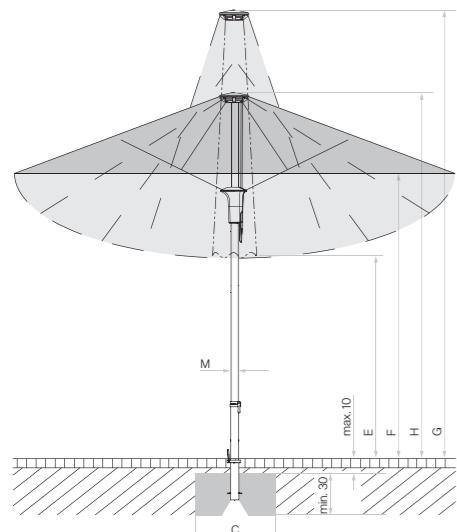

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), guarantee water drainage

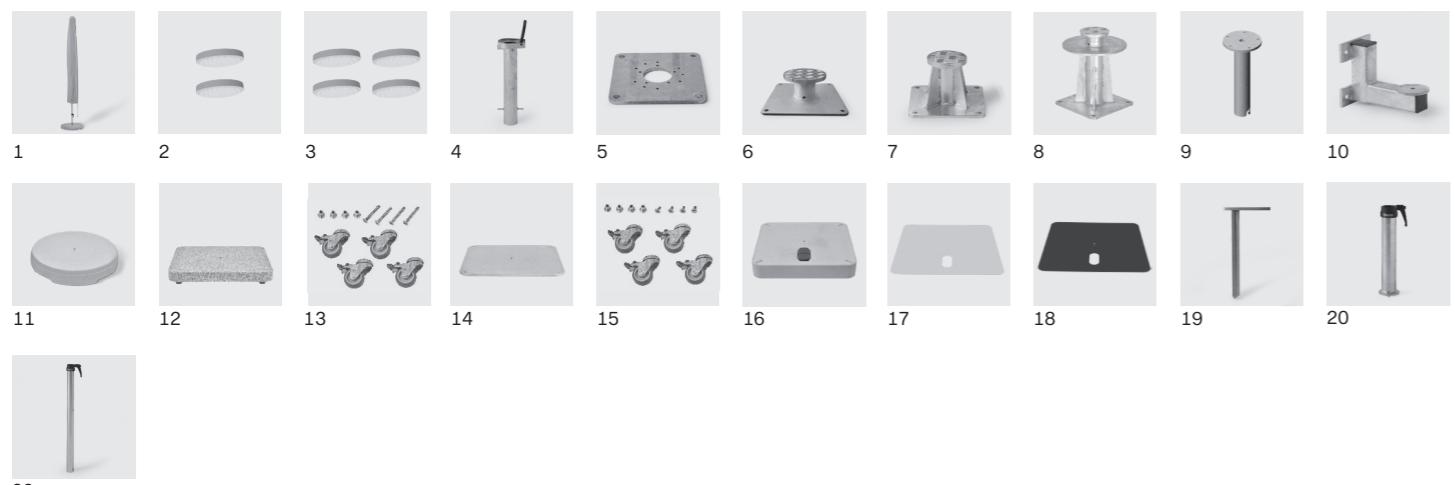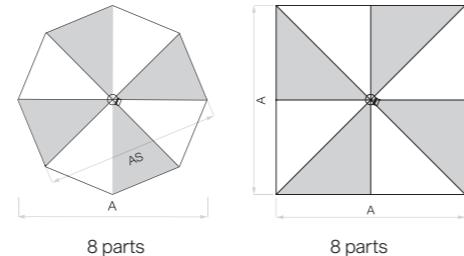

Accessories FORTINO® Pro

Protective cover

Protective cover made of coated, tear-resistant polyester fabric

1	Protective cover with zip and rod ripstop	350 01 609 706
---	---	----------------

Accessories

Electrical accessories

2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger	350 01 563 000
---	--	----------------

3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger	350 01 563 100
---	--	----------------

Fixations

Ground sockets

4	Ground socket BT, hot-dip galvanised steel	Connection tube BT	350 01 206 100
---	--	--------------------	----------------

Mounting plates

5	Mounting plate M4 / M8, 30 x 30 x 1.5 cm, hot-dip galvanised steel	Adapter M4 to Z +	350 01 226 921
---	--	-------------------	----------------

6	Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	Adapter M4 to Z +	350 01 226 932
---	--	-------------------	----------------

7	Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	Adapter M4 to Z +	350 01 226 930
---	---	-------------------	----------------

8	Mounting plate M4 for high insulation (50–350 mm), installation height (50–350 mm) made to measure (higher on request), hot-dip galvanised steel	Adapter M4 to Z +	350 01 222 510
---	--	-------------------	----------------

Adapters

9	Adapter M4 to Z, hot-dip galvanised steel	Support tube Z	350 01 221 600
---	---	----------------	----------------

Wall consoles

10	Wall bracket Z, 180 mm, hot-dip galvanised steel	Support tube Z	350 01 205 000
----	--	----------------	----------------

Bases

11	Concrete base Z, 40 kg, Ø 60 x 8.5 cm, light concrete	Support tube Z	350 01 111 116
----	---	----------------	----------------

1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60 x 8.5 cm, light concrete

11	¹ Concrete base Z, 40 kg, Ø 60 x 8.5 cm	Support tube Z	350 01 109 529
----	--	----------------	----------------

11	Concrete base Z, 55 kg, Ø 60 x 11 cm, light concrete	Support tube Z	350 01 111 216
----	--	----------------	----------------

1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60 x 11 cm, light concrete

12	Natural granite base Z, 40 kg, 50 x 50 x 8 cm, natural stone, matt ^{NEW}	Support tube Z	350 01 109 432
----	---	----------------	----------------

¹Natural granite base Z, 55 kg, 59 x 59 x 8 cm, natural stone

12	Natural granite base Z, 55 kg, 59 x 59 x 8 cm, natural stone, matt ^{NEW}	Support tube Z	350 01 109 434
----	---	----------------	----------------

13	³ ⁸ Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel	Support tube Z	350 01 109 487
----	---	----------------	----------------

³⁸Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304

14	Steel base Z 40 kg, 58.5 x 58.5 x 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 810
----	--	----------------	----------------

¹Steel base Z 55 kg, 68.5 x 68.5 x 2 cm, hot-dip galvanised steel

14	Steel base Z 55 kg, 68.5 x 68.5 x 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 910
----	--	----------------	----------------

15	³ ⁸ Set of castors for steel base Z, 40/55 kg, Ø 5 cm, galvanised steel	Support tube Z	350 01 101 000
----	---	----------------	----------------

³⁸Set of castors for steel base Z, 40/55 kg, Ø 5 cm, high-grade steel 1.4301 / 304

16
<td