

PIAZZA®

**Frame**

8 ribs
Aluminium wood look
Continuous pole Ø 48 mm

Function

Pulley system for opening and closing
Fixed with a metal pin
The runner can be fixed at various heights for optimum fabric tension

Frame colour

Aluminium wood look

Canopy

Fabric Quality 5: polyacrylic, 300 g/m², UV protection > 98%
Fabric Quality 4: polyester, 250 g/m², UV protection > 98%
Fabric Quality 2: polyester, 220 g/m², UV protection > 98%

Flounce

Only available without

Protective cover

Can be ordered as an optional extra

Electrical accessories


Osyrian Spot LED with integrated battery pack




01/2026 en - 259 422 602 31 © by Glatz AG

PIAZZA®

The wind-stable in a charming wood look

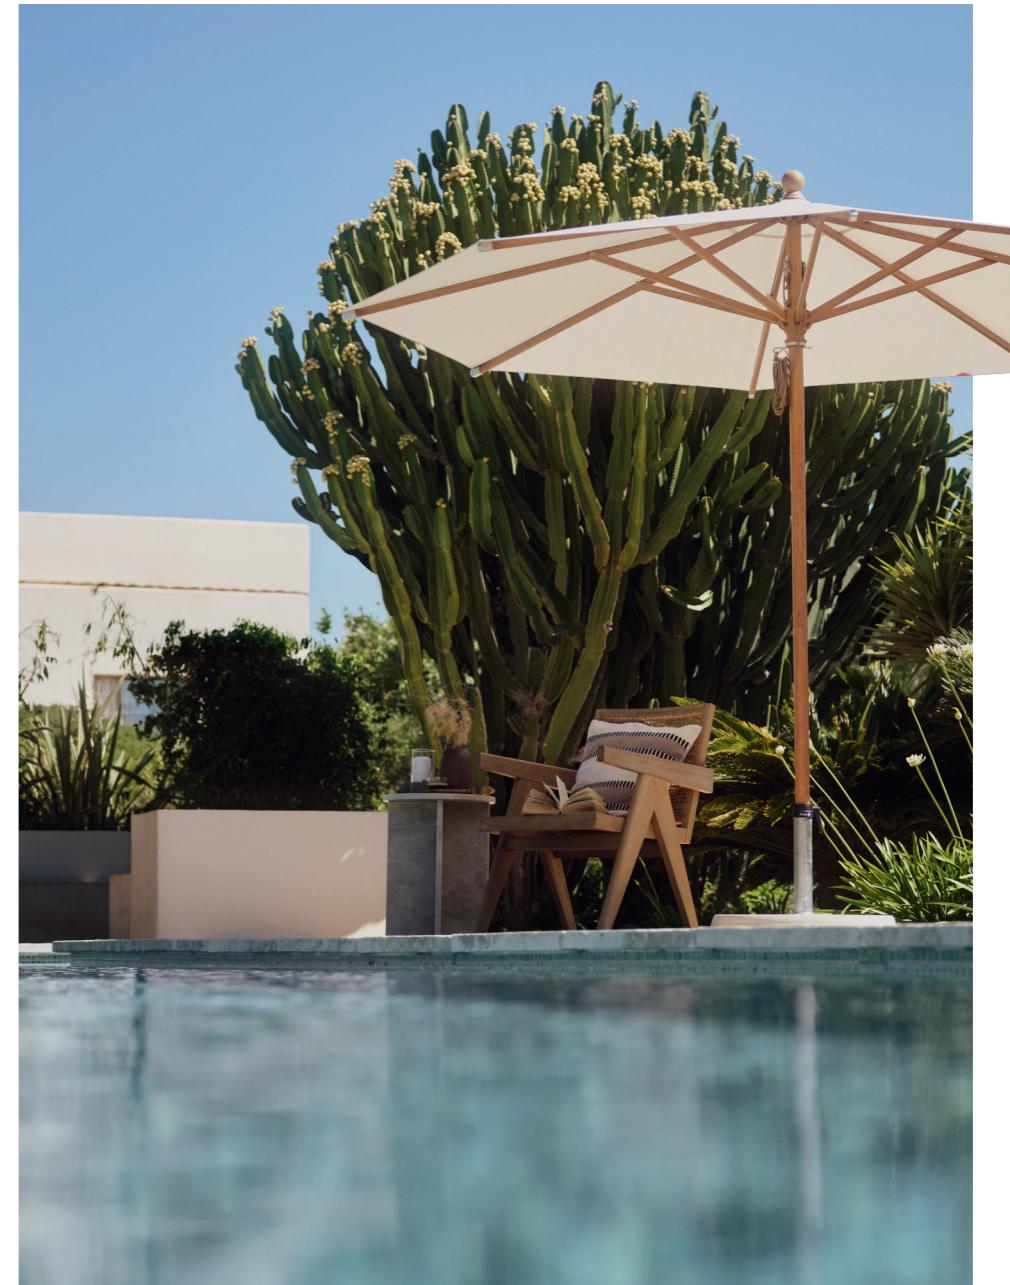

Usage locations



Fixation



Valid from 1.1.2026
glatz.com

Glatz *

Assortment

Frame aluminium, wood look

Shape Nominal size Number of ribs Order no.

cm							
○	Ø 250	8					174 00 250 761
○	Ø 300	8					174 00 300 761
□	250 x 250	8					174 00 251 761

Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Foundation	Minimum weight for base	Max. wind speed open
cm	cm	cm	m ²	cm	cm	cm	cm	kg	km/h (Bft)
A	AS	M		E	F	G	C		
Ø 250	230	4.8	4.4	110	205	250	60 x 60	40	75 (9)
Ø 300	275	4.8	6.4	90	205	255	70 x 70	55	55 (7)
250 x 250	-	4.8	6.3	60	205	250	70 x 70	55	60 (7)


The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5\text{ cm}$).

The height dimensions are based on the ground socket PX (structure 15 cm). In the base variations these might differ slightly. Apart from the steel base minus 7.5 cm.



For the variants with a mounting plate and support tube M4, the specified heights are reduced by 12–13 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

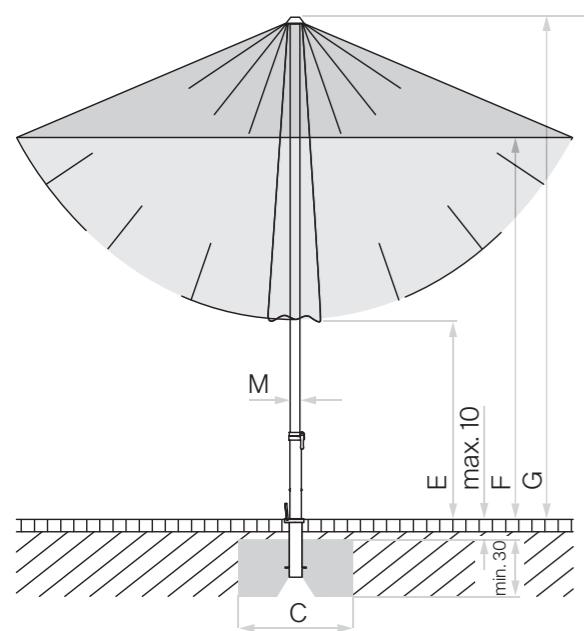

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), guarantee water drainage

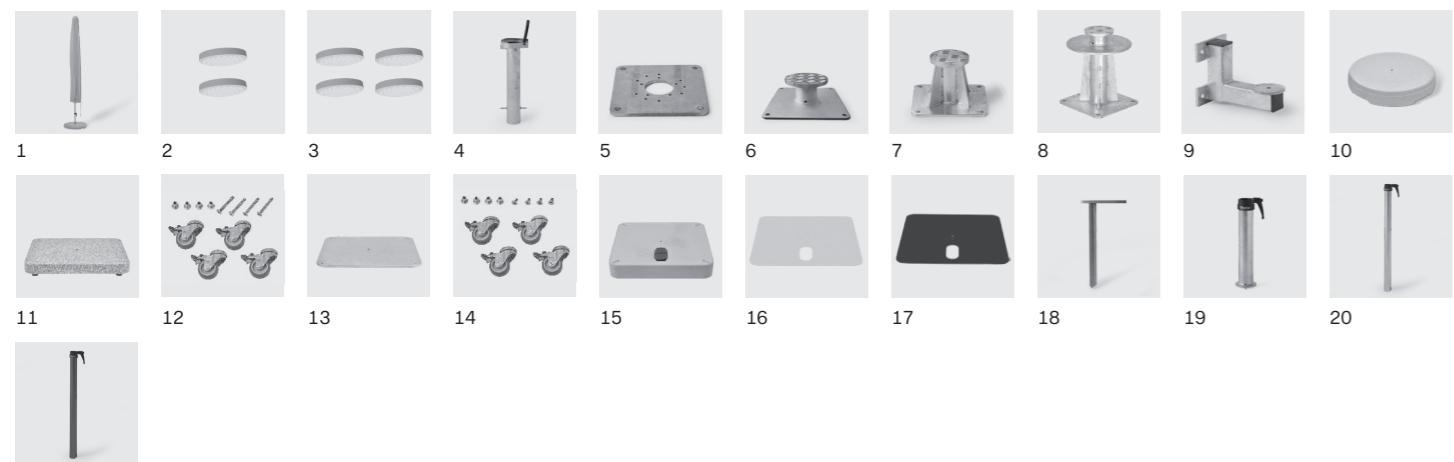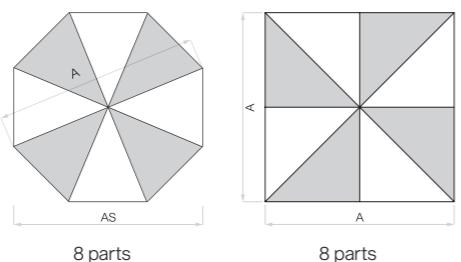

Protective cover

Protective cover made of coated, tear-resistant polyester fabric

1 Protective cover with zip and rod, 205 x 45 cm	350 01 609 800
--	----------------

Accessories

Electrical accessories

2 OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger	350 01 563 000
3 OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger	350 01 563 100

Fixations

Ground sockets

4 Ground socket PX, hot-dip galvanised steel	Connection tube PX	350 01 207 001
4 Ground socket PX, high-grade steel 1.4301 / 304	Connection tube PX	350 01 207 011

Mounting plates

5 Mounting plate M4 / M8, 30 x 30 x 1.5 cm, hot-dip galvanised steel	Support tube M4	350 01 226 921
6 Mounting plate M4 special, for installation height 50–149 mm, hot-dip galvanised steel	Support tube M4	350 01 226 932
7 Mounting plate M4 special, for installation height 150–350 mm, hot-dip galvanised steel	Support tube M4	350 01 226 930
8 Mounting plate M4 for high insulation (50–350 mm), installation height (50–350 mm) made to measure (higher on request), hot-dip galvanised steel	Support tube M4	350 01 222 510

Wall consoles

9 Wall bracket Z, 180 mm, hot-dip galvanised steel	Support tube Z	350 01 205 000
--	----------------	----------------

Bases

10 Concrete base Z, 40 kg, Ø 60 x 8.5 cm, light concrete	Support tube Z	350 01 111 116
1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60 x 8.5 cm, light concrete	Support tube Z	350 01 112 116
10 ¹ Concrete base Z, 40 kg, Ø 60 x 8.5 cm	Support tube Z	350 01 109 529
10 Concrete base Z, 55 kg, Ø 60 x 11 cm, light concrete	Support tube Z	350 01 111 216
1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60 x 11 cm, light concrete	Support tube Z	350 01 112 216
11 Natural granite base Z, 40 kg, 50 x 50 x 8 cm, natural stone, matt NEW	Support tube Z	350 01 109 432
11 ¹ Natural granite base Z, 55 kg, 59 x 59 x 8 cm, natural stone	Support tube Z	350 01 109 447
11 Natural granite base Z, 55 kg, 59 x 59 x 8 cm, natural stone, matt NEW	Support tube Z	350 01 109 434
12 ³ Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, galvanised steel	Support tube Z	350 01 109 487
12 ^{3,8} Set of castors for natural granite base Z, 40/55/90 kg / M4, 120 kg, Ø 5 cm, high-grade steel 1.4301 / 304	Support tube Z	350 01 109 486
13 Steel base Z 40 kg, 58.5 x 58.5 x 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 810
13 Steel base Z 55 kg, 68.5 x 68.5 x 2 cm, hot-dip galvanised steel	Support tube Z	350 01 100 910
14 ³ Set of castors for steel base Z, 40/55 kg, Ø 5 cm, galvanised steel	Support tube Z	350 01 101 001
14 ^{3,8} Set of castors for steel base Z, 40/55 kg, Ø 5 cm, high-grade steel 1.4301 / 304	Support tube Z	350 01 101 000

Bases with castors

15 ^{3,7} Base with castors Z, 55 kg, 65 x 65 x 11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 200
^{3,7} 1 pallet (5 pieces) base with castors Z, 55 kg, 65 x 65 x 11 cm, light concrete (without decorative plate)	Support tube Z + decorative plate	350 01 113 280
16 ¹ Decorative plate in grey white RAL 9002 for base with castors Z, 55 kg, aluminium composite		350 01 113 310
17 Decorative plate in anthracite RAL 7016 for base with castors Z, 55 kg, aluminium composite		350 01 113 320

Various fixation types

18 Lawn spike Z, 85 x 150 x 350 mm, hot-dip galvanised steel	Support tube Z	350 01 205 400
--	----------------	----------------

Support tubes/connection tubes

19 Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 201 210
19 Support tube Z, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 201 282
19 Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 201 300
19 Support tube M4, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 200 035
20 Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel		350 01 206 001
21 Connection tube PX, Ø 48 / 55 mm, hot-dip galvanised steel, powder coated anthracite		350 01 206 082
Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304		350 01 206 011

¹while stocks last

³only suitable for smooth, joint free surface coverings

⁵⁵55 kg: Ground clearance 7 mm

⁸suitable for corrosive environments